


HD OB2

DATASHEET



- Mid-sized OB Van, 13.5 meter length, with extendable side
- 4 separate areas, up to 13 workspaces
- GrassValley LDX series cameras
(LDX80 Première, LDX80 Première Incam-G wireless and LDX86 HiSpeed cameras)
- Sony MVS-6000 multi-format switcher with a 3ME control panel
- Lawo mc²56 MKII audio console
- Riedel Artist communication system, Medionet fiber transport system
- Vutrix and Sony quad and single displays, each assignable from video router

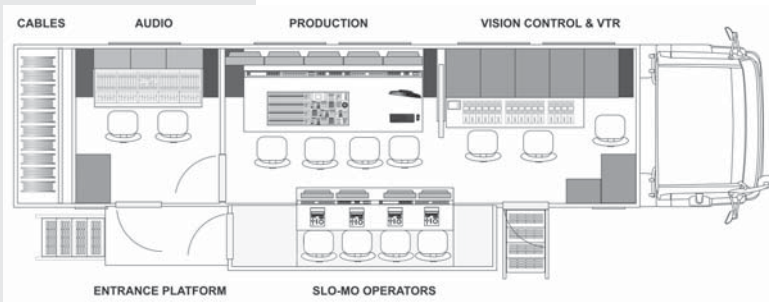

CAMERAS

- up to 12x GrassValley LDX80 Première
- up to 2x GrassValley LDX86 SSL camera
- up to 2x GrassValley LDX80 Première Incam-G wireless camera
- Fujinon lenses from 14x4.5 to 101x8.9

VISION CONTROL AREA

- 4x Sony TriMaster OLED 19" monitors
- 11x Vutrix 10" dual monitors
- 3G / HD / SD Miranda NVISION NV8288 Video router 156x240
- 3x Harris measurement devices
- 4x Imagine Communications frame synchronizers



RECORDERS

- 3x EVS XT[3] Channel max.
- EVS IP Director
- up to 2x VTRs

PRODUCTION AREA

- Sony MVS-6000 Multiformat Switcher with 3M/E 32XPT panel + AUX control panel
- 49 input, 48 output
- 2.5 M/E
- 4 keyers per M/E, 2 with 2.5D resizer + 2 DSK
- 2ch DME
- 8 channel internal clipstore
- 3x Vutrix 24" displays, 12x Vitrix 23" quad displays



AUDIO AREA

- Lawo mc² 56 MKII audio console
- 3x16 faders
- 2 DSP cards for total 192 full broadcast DSP channels
- 2 external MADI interfaces
- 2x remote Dallis Stageboxes, 24 inputs - 8 outputs each (redundant PSU, DSP, and fiber connection)
- 1x Vpro8 Video and Audio processor with Dolby E Encoder and Decoder option
- Dynaudio BM 5 Compact 5.1 Loudspeaker System
- Miranda Dolby E encoder, Dolby E decoder
- Intercom
 - Riedel Artist 64
 - Connect Trio ISDN/Telephone interface
 - RiFace G2 2 way radio interface
 - Riedel Acrobat CC-8 full duplex wireless talkback system



antenna
● ● ● HUNGÁRIA

MORE INFORMATION:

sales@ahrt.hu

+36 1 464 2564