


HD OB7

DATASHEET



- XL sized OB Van, 16.5 meter length, with extendable side
- 4 separate areas
- GrassValley LDX series cameras (LDX86N WorldCam – can be upgrade to LDX 86N Universe 4K, LDX80 Première Incam-G wireless and LDX86 HiSpeed cameras)
- Sony MVS-8000X multi-format switcher (can be upgrade to 4K) with a 3ME control panel
- Lawo mc² 56 MKII audio console
- Riedel Artist communication system
- GV MULTIVIEWER 6x 46" NEC MONITOR, each assignable from video router
- Mediornet fiber transport system
- up to 20 workspaces

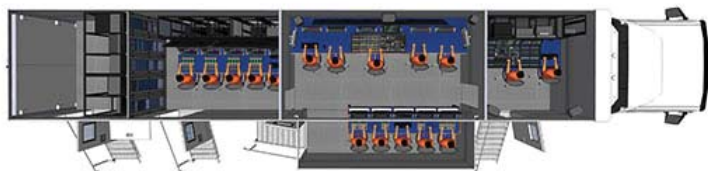

CAMERAS

- up to 12x LDX86N WorldCam – can be upgrade to LDX 86N Universe 4K
- up to 2x LDX80 Première Incam-G wireless
- up to 2x and LDX86 HiSpeed camera
- Fujinon lenses from 14x4.5 to 101x8.9

VISION CONTROL AREA

- 5x Sony TriMaster OLED 19" monitors
- 5x VUTRIX QUAD, 5x Dual monitors
- 3G / HD / SD Miranda NVISION NV8140 Video router 288x575
- 4x Leader measurement devices
- 4x Imagine Communications frame synchronizers (dual)

RECORDERS

- 5x EVS XT[3] Channel max
- EVS IP Director
- up to 2x VTRs

PRODUCTION AREA

- Sony MVS-8000X Multiformat Switcher with 3M/E 32XPT panel + AUX control panel
- 60 input, 48 output
- 3 M/E
- 4 keyers per M/E each with 2.5D resizer
- 8 channel internal clipstore
- 6x 46" NEC, GV MULTIVIEWER

AUDIO AREA

- Lawo mc² 56 MKII audio console
- 3x16 faders
- 2 DSP cards for total 192 full broadcast DSP channels
- 20 external MADI interfaces
- 2x remote Dallis Stageboxes, 32 inputs - 8 outputs each (redundant PSU, DSP, and fiber connection)
- 2x Vpro8 Video and Audio processor with Dolby E encoder and decoder option
- Genelec 8030 5.1 Loudspeaker System
- Intercom
 - Riedel Artist 64
 - Connect Trio ISDN/Telephone interface
 - RiFace G2 2 way radio interface
 - Riedel Acrobat CC-8 full duplex wireless talkback system

